



A1A:140.XX

VOLTAGE RATINGS

Part Number	V_{RRM}, V_R (V) Max. rep. peak reverse voltage		V_{RSM}, V_R (V) Max. non- rep. peak reverse voltage
	$T_J = 0$ to 180°C	$T_J = -40$ to 0°C	
	$T_J = 25$ to 180°C		
A1A:140.02	200	200	300
A1A:140.04	400	400	500
A1A:140.06	600	600	700
A1A:140.08	800	800	900
A1A:140.10	1000	1000	1100
A1A:140.12	1200	1200	1300
A1A:140.14	1400	1400	1500
A1A:140.16	1600	1600	1700

This datasheet applies to:

**Metric thread: A1A:140.XX,
A1B:140.XX**

**Inch thread: A2A:140.XX,
A2B:140.XX**

MAXIMUM ALLOWABLE RATINGS

PARAMETER	VALUE	UNITS	NOTES
T_J Junction Temperature	-40 to 180	$^\circ\text{C}$	-
T_{stg} Storage Temperature	-40 to 180	$^\circ\text{C}$	-
$I_{F(AV)}$ Max. Av. current @ Max. T_C	140	A	180° half sine wave
	125	$^\circ\text{C}$	
$I_{F(RMS)}$ Nom. RMS current	280	A	-
I_{FSM} Max. Peak non-rep. surge current	2300	A	50 Hz half cycle sine wave Initial $T_J = 180^\circ\text{C}$, rated V_{RRM} applied after surge.
	2400		60 Hz half cycle sine wave
	2700		50 Hz half cycle sine wave Initial $T_J = 180^\circ\text{C}$, no voltage applied after surge.
	2850		60 Hz half cycle sine wave
I^2t Max. I^2t capability	26	kA^2s	$t = 10\text{ms}$ Initial $T_J = 180^\circ\text{C}$, rated V_{RRM} applied after surge.
	24		$t = 8.3\text{ms}$
	37		$t = 10\text{ms}$ Initial $T_J = 180^\circ\text{C}$, no voltage applied after surge.
	34		$t = 8.3\text{ms}$
$I^2t^{1/2}$ Max. $I^2t^{1/2}$ capability	220	$\text{kA}^2\text{s}^{1/2}$	Initial $T_J = 180^\circ\text{C}$, no voltage applied after surge. I^2t for time $t_x = I^2t^{1/2} * t_x^{1/2}$. ($0.1 < t_x < 10\text{ms}$).
F Mounting Force	10(~89)	N.m(Lbf.in)	-



A1A:140.XX

CHARACTERISTICS

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
V _{FM} Peak forward voltage	---	1.15	1.43	V	Initial T _J = 25°C, sinusoidal wave, I _{peak} = 440A.
V _{F(TO)} Threshold voltage	---	---	0.90	V	T _J = 180°C, Av. Power = V _{F(TO)} *I _{F(AV)} + r _F *[I _{F(RMS)}] ² , sine.
r _{F1} Forward slope resistance	---	---	0.65	m	Use low values for I _{FM} < I _{F(AV)}
I _{RM} Peak reverse current	---	10	20.00	mA	T _J = 180°C. Max. Rated V _{RRM}
R _{thJC} Thermal resistance, junction-to-case	---	---	0.35	°C/W	DC operation
	---	---	0.40	°C/W	180° sine wave
	---	---	0.43	°C/W	120° rectangular wave
R _{thCS} Thermal resistance, case-to-sink	---	---	0.08	°C/W	Mtg. Surface smooth, flat and greased. Single side.
wt Weight	---	100(3.5)	---	g(oz.)	---
Case Style	DO-205AA (DO-8)		JEDEC	---	

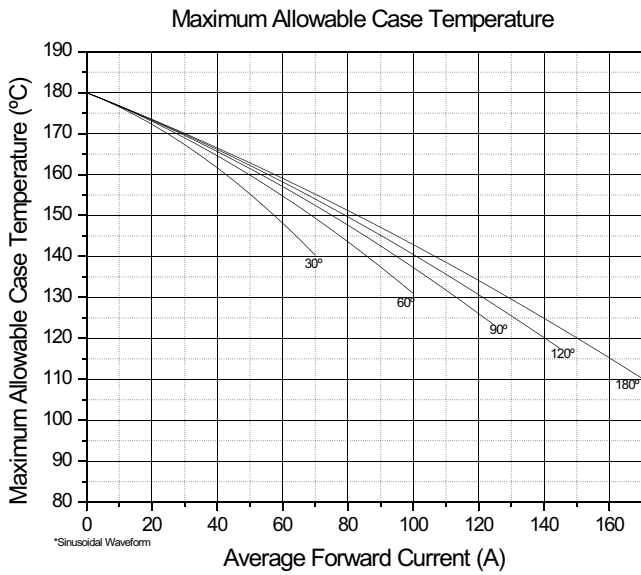


Fig. 1 - Current Ratings Characteristics

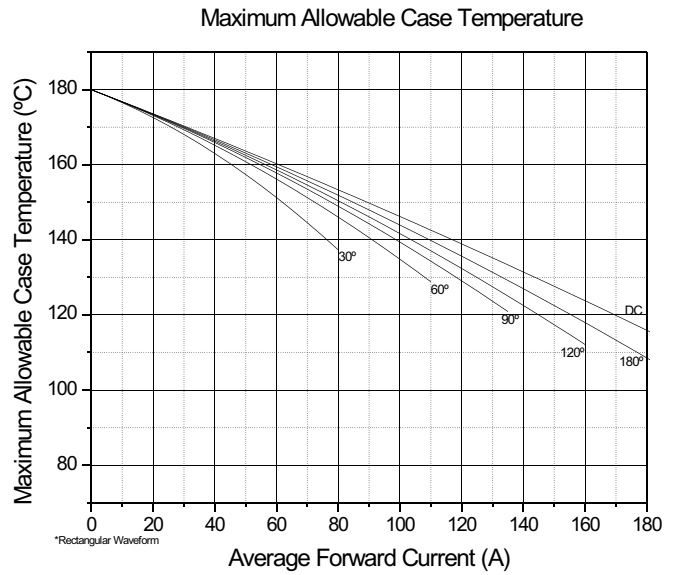


Fig. 2 - Current Ratings Characteristics



A1A:140.XX

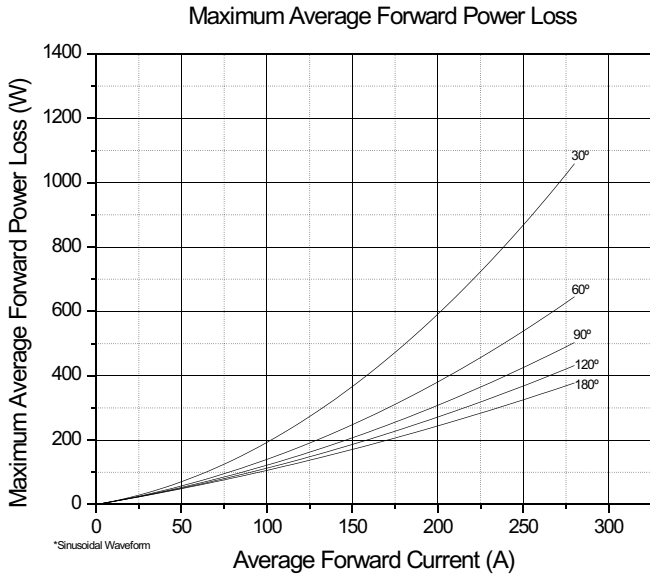


Fig. 3 - Forward Power Loss Characteristics

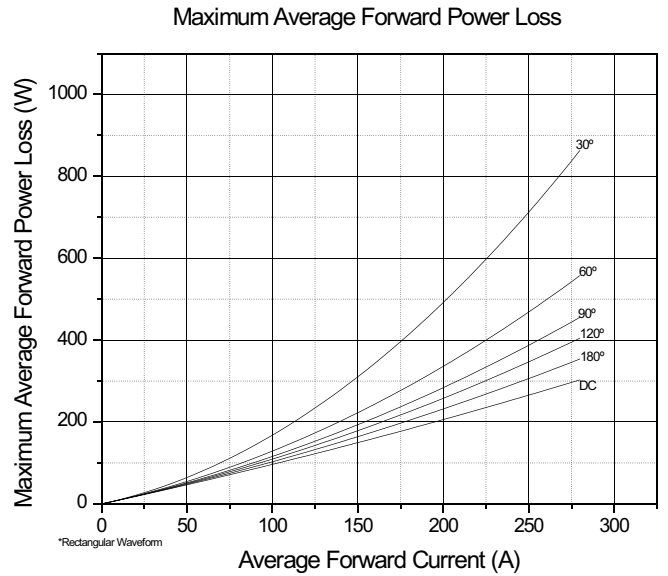


Fig. 4 - Forward Power Loss Characteristics

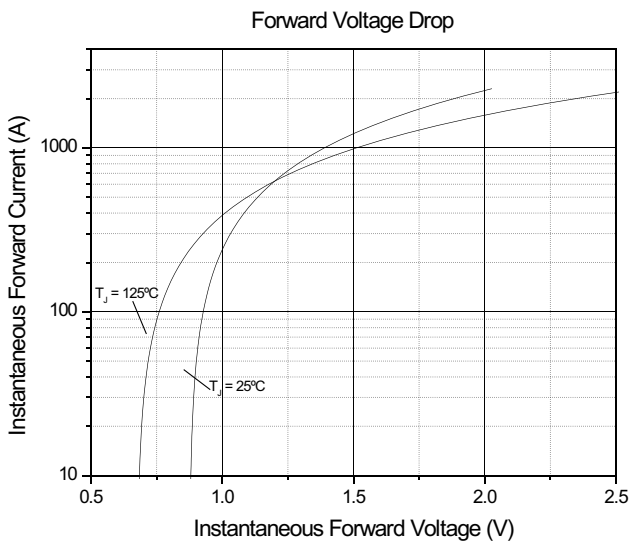


Fig. 5 - Forward Voltage Drop Characteristics

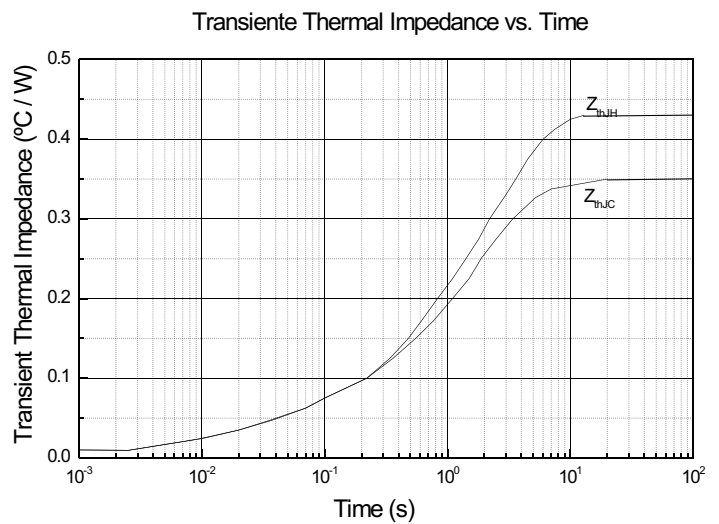



Fig. 6 - Transient Thermal Impedance Characteristics



AEGIS
SEMICONDUCTORES LTDA.

A1A:140.XX

DO-205AA (DO-8)

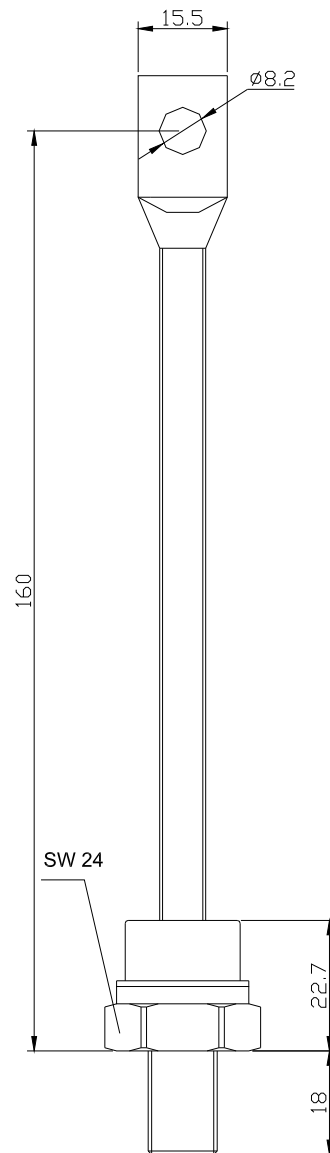

M12 x 1.75
1/2" UNF 2A