



A1A:340.XX

VOLTAGE RATINGS

Part Number	V _{RRM} , V _R (V) Max. rep. peak reverse voltage		V _{RSM} , V _R (V) Max. non-rep. peak reverse voltage
	T _J = 0 to 175°C	T _J = -40 to 0°C	
A1A:340.02	200	200	300
A1A:340.04	400	400	500
A1A:340.06	600	600	700
A1A:340.08	800	800	900
A1A:340.10	1000	1000	1100
A1A:340.12	1200	1200	1300
A1A:340.14	1400	1400	1500
A1A:340.16	1600	1600	1700

This datasheet applies to:

**Metric thread: A1A:340.XX,
A1B:340.XX**

**Inch thread: A2A:340.XX,
A2B:340.XX**

MAXIMUM ALLOWABLE RATINGS

PARAMETER	VALUE	UNITS	NOTES
T _J Junction Temperature	-40 to 175	°C	-
T _{stg} Storage Temperature	-40 to 175	°C	-
I _{F(AV)} Max. Av. current @ Max. T _C	340	A	180° half sine wave
	150	°C	
I _{F(RMS)} Nom. RMS current	700	A	-
I _{FSM} Max. Peak non-rep. surge current	7798	A	50 Hz half cycle sine wave Initial T _J = 175°C, rated V _{RRM} applied after surge.
	8500		60 Hz half cycle sine wave
	9275		50 Hz half cycle sine wave Initial T _J = 175°C, no voltage applied after surge.
	10110		60 Hz half cycle sine wave
I ² t Max. I ² t capability	276	kA ² s	t = 10ms Initial T _J = 175°C, rated V _{RRM} applied after surge.
	301		t = 8.3 ms
	391		t = 10ms Initial T _J = 175°C, no voltage applied after surge.
	426		t = 8.3 ms
I ² t ^{1/2} Max. I ² t ^{1/2} capability	3200	kA ² s ^{1/2}	Initial T _J = 175°C, no voltage applied after surge. I ² t for time t _x = I ² t ^{1/2} * t _x ^{1/2} . (0.1 < t _x < 10ms).
F Mounting Force	30(~267)	N.m(Lbf.in)	-



A1A:340.XX

CHARACTERISTICS

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
V _{FM} Peak forward voltage	---	1.15	1.37	V	Initial T _J = 25°C, sinusoidal wave, I _{peak} = 1068A.
V _{F(TO)} Threshold voltage	---	---	0.97	V	T _J = 175°C, Av. Power = V _{F(TO)} *I _{F(AV)} +r _F *[I _{F(RMS)}] ² , sine.
r _F Forward slope resistance	---	---	0.32	m	Use low values for I _{FM} < I _{F(AV)}
I _{RM} Peak reverse current	---	---	30.00	mA	T _J = 175°C. Max. Rated V _{RRM}
R _{thJC} Thermal resistance, junction-to-case	---	---	0.15	°C/W	DC operation
	---	---	0.17	°C/W	180° sine wave
	---	---	0.19	°C/W	120° rectangular wave
R _{thCS} Thermal resistance, case-to-sink	---	---	0.03	°C/W	Mtg. Surface smooth, flat and greased. Single side.
wt Weight	---	250(8.75)	---	g(oz.)	---
Case Style	DO-205AB (DO-9)			JEDEC	---

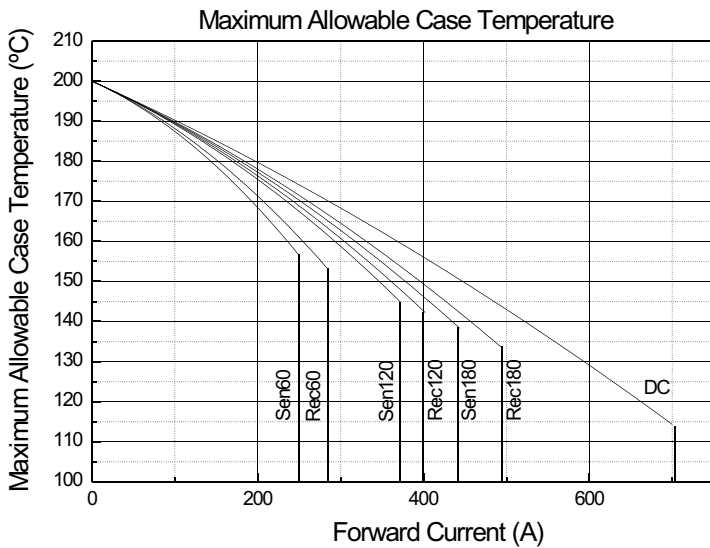


Fig. 1 - Current Ratings Characteristics

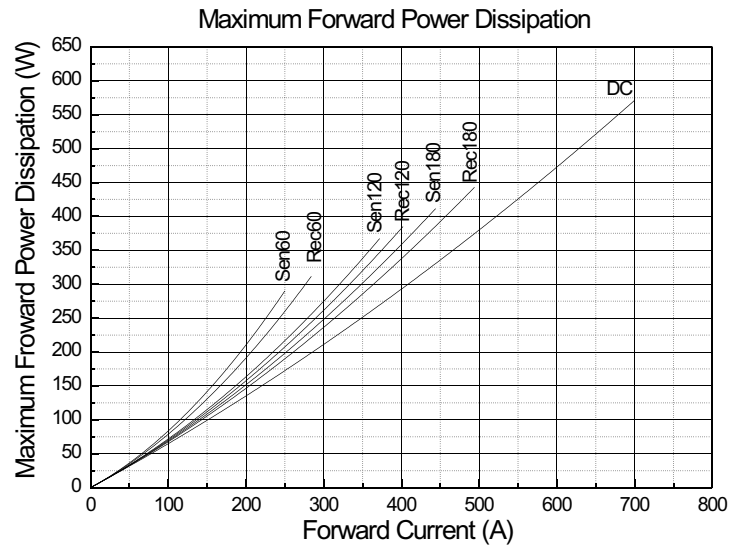


Fig. 2 - Forward Power Loss Characteristics



A1A:340.XX

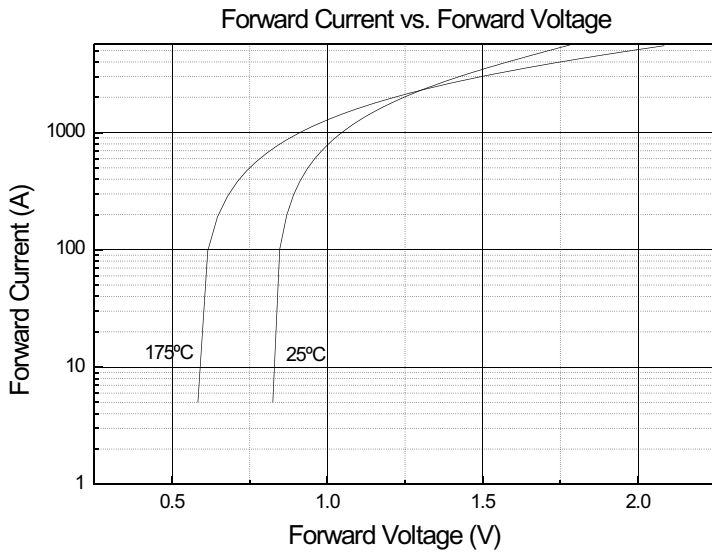


Fig. 3 - Forward Voltage Drop Characteristics

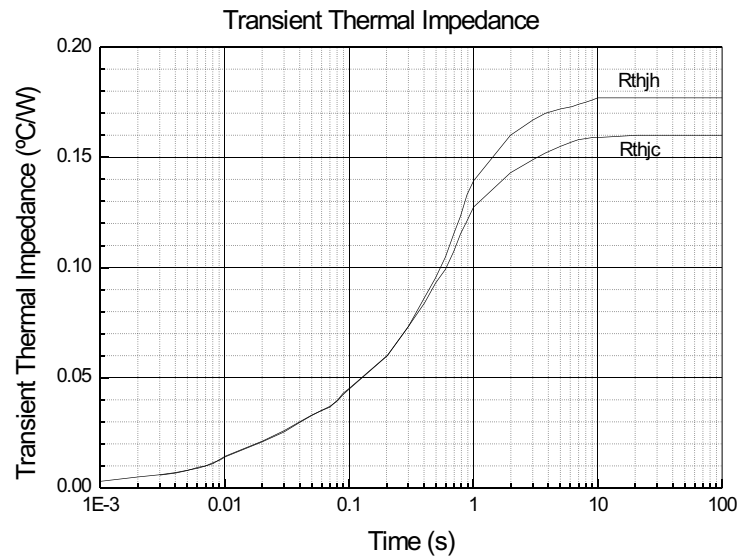


Fig. 4 - Transient Thermal Impedance Characteristics

DO-205AB (DO-9)

